




Planar DirectLight Pro Series

MicroLED Video Walls

- ▶ 0.9, 1.2, 1.5 and 1.8mm pixel pitches
- ▶ Featuring MicroLED technology
- ▶ 1,600-nit High Brightness Model with standard power consumption
- ▶ Low Power Model with standard 500-nit brightness
- ▶ Compatible with multiple controllers
- ▶ Planar® EverCare™ Lifetime Limited Warranty




Planar® DirectLight® Pro Series fine pixel pitch MicroLED video walls deliver beautiful imagery to suit a wide range of indoor, fixed installation applications. With pixel pitches from 0.9 to 1.8 millimeters, the TAA-compliant Planar DirectLight Pro Series delivers all the benefits of MicroLED technology as well as front serviceability and high bandwidth, reducing deployment complexity while maximizing efficiency.

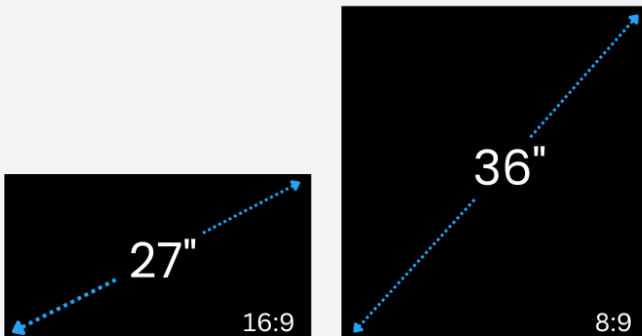

Engrained Efficiency

Planar DirectLight Pro Series video walls are designed to offer a more efficient installation process, with fewer components needed while maintaining high visual quality. The use of larger 27" and double-tall 36" LED cabinets helps streamline the setup, reducing visible seams and making maintenance simpler.

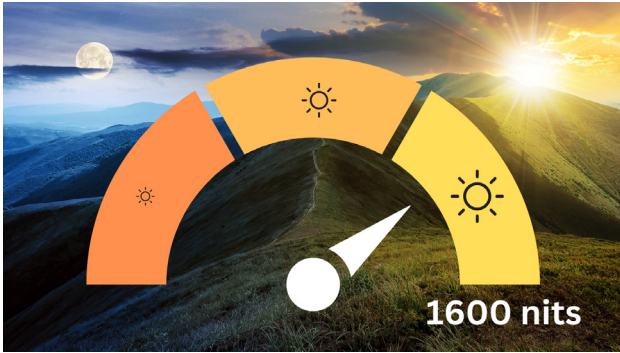


Brightness Meets Efficiency

High Brightness model built for maximum performance in high ambient light environments delivers 1,600 nits of sustained brightness with only 135 watts of power consumption.



Energy-Conscious Option

Low Power model delivers 500 nits of brightness with only 68 watts of power consumption, making it ideal for energy-conscious customers or applications with low ambient light conditions.

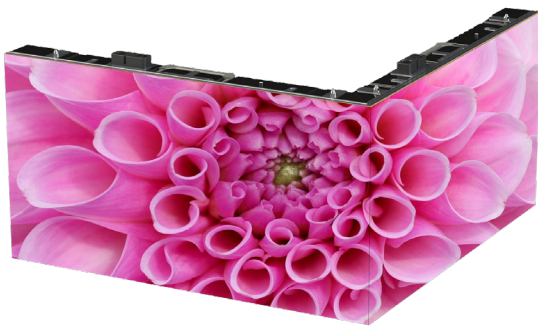

Turn the Corner

Display modules and cabinets have 45° beveled edges enabling video walls to wrap around 90° corners for unique installations, and opening the displays for use in more creative applications.



Flexible Control

Planar® WallDirector™ Video Controller offers robust default processing while compatibility with Brompton and Colorlight gives customers the freedom to choose the ideal solution for their application's unique requirements.



High Bandwidth

Most models offer 5x the bandwidth of competitive solutions, reducing total cost of ownership with fewer cabinets, cables and internal components like receivers and power supplies.



Lifetime Protection

Planar DirectLight Pro Series is protected by the Planar® EverCare™ Lifetime Limited Warranty which covers the whole display, everything from the sub-pixels to the video controller, for as long as it is used in a fixed location.

Configure a Video Wall

Planar DirectLight Pro Series video walls feature a modular design with display cabinets that stack like building blocks in any configuration. Create video walls with custom sizes, shapes, corners, curves and resolutions.

Full HD 1920 x 1080 **4K** 3840 x 2160 **8K** 7680 x 4320



| Models | 1 x 1 | 2 x 2 | 3 x 3 | 4 x 4 | 5 x 5 | 6 x 6 | 7 x 7 | 8 x 8 | 9 x 9 | 10 x 10 | 11 x 11 | 12 x 12 |
|----------------|-----------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| DLP 0.9 | 640 x 360 | 1280 x 720 | 1920 x 1080 | 2560 x 1440 | 3200 x 1800 | 3840 x 2160 | 4480 x 2520 | 5120 x 2880 | 5760 x 3240 | 6400 x 3600 | 7040 x 3960 | 7680 x 4320 |
| DLP 1.2 | 480 x 270 | 960 x 540 | 1440 x 810 | 1920 x 1088 | 2400 x 1350 | 2880 x 1620 | 3360 x 1890 | 3840 x 2176 | 4320 x 2430 | 4800 x 2700 | 5280 x 2970 | 5760 x 3240 |
| DLP 1.5 | 384 x 216 | 768 x 432 | 1152 x 648 | 1536 x 864 | 1920 x 1080 | 2304 x 1296 | 2688 x 1512 | 3072 x 1728 | 3840 x 2176 | 3840 x 2160 | 4224 x 2376 | 4608 x 2592 |
| DLP 1.8 | 320 x 180 | 640 x 360 | 960 x 540 | 1280 x 720 | 1600 x 900 | 1920 x 1080 | 2240 x 1260 | 2560 x 1440 | 2880 x 1620 | 3200 x 1800 | 3520 x 1980 | 3840 x 2160 |

| Video Wall Sizes | | | | | | | | | | | | |
|--------------------|---------------------------|---------------------------|---------------------------|-----------------------------|---------------------------|----------------------------|----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| Area (sq m) | 0.21 | 0.82 | 1.85 | 3.29 | 5.14 | 7.41 | 10.08 | 13.17 | 16.67 | 20.58 | 24.90 | 29.63 |
| Diagonal | 27" | 55" | 82" | 109" | 137" | 164" | 191" | 219" | 246" | 273" | 301" | 328" |
| Feet/Meters | 2.0 x 1.1ft 0.6 x 0.3m | 4.0 x 2.2ft 1.2 x 0.7m | 6.0 x 3.4ft 1.8 x 1.0m | 7.9 x 4.5ft 2.4m x 1.4ft | 9.9 x 5.6ft 3.0 x 1.7m | 11.7 x 6.9ft 2.0 x 3.6m | 14.0 x 7.8ft 4.2 x 2.4m | 15.9 x 8.9ft 4.8m x 2.7m | 17.9 x 10.1ft 3.1 x 5.4m | 19.8 x 11.2ft 6.0 x 3.4m | 21.8 x 12.2ft 6.7 x 3.7m | 23.8 x 13.4ft 7.3 x 4.1m |



Extended Ruggedness & Optics

Displays are available with Planar® ERO-LED™ (Extended Ruggedness and Optics™) protective coating that adds durability in high-traffic and interactive environments.



Enable Interactivity

Optimize video walls with a custom 32-point touch system and Planar ERO-LED. The touch solution is not limited to a 16:9 aspect ratio, opening the door to more sizes and shapes.



Always-On Reliability

Planar DirectLight Pro Series displays are designed for mission-critical environments where displays need to withstand extended or continuous operation day and night. Control rooms, hospitals and other applications that can't afford downtime benefit from exceptional performance 24x7.



Low-Power Standby Mode

When not in use, enable the video wall to enter a low power mode with the optional Planar® Smart Power Switch. The slim, LAN-connected AC switch fits behind the video wall displays and lowers power draw from each column of cabinets.

Specifications

| Cabinet Model | DLP 0.9 | DLP 1.2 | DLP 1.5 | DLP 1.8 |
|--|--|------------------------------------|------------------------------------|------------------------------------|
| Pixel Pitch | 0.945mm | 1.26mm | 1.575mm | 1.89mm |
| Cabinet Resolution | 27" - 640 x 360 36" - 640 x 720 | 27" - 480 x 270 36" - 480 x 540 | 27" - 384 x 216 36" - 384 x 432 | 27" - 320 x 180 36" - 320 x 360 |
| Pixel Density | 1,119,789/sq m 104,032/sq ft | 629,882/sq m 58,518/sq ft | 403,124/sq m 37,451/sq ft | 279,947/sq m 26,008/sq ft |
| Brightness Max, Calibration On | 1,000cd/sq | | | |
| Viewing Angle (50% Brightness) | >170° Horizontal; >140° Vertical | | | |
| Cabinet Size (W x H x D) | 27" - 604.8 x 340.2 x 72.5mm 23.81 x 13.39 x 2.85in 36" - 604.8 x 680.4 x 72.5mm 23.81 x 26.78 x 2.85in | | | |
| Weight (Cabinet) | 27" - 6.94kg 15.3lbs 36" - 13.2kg 29.1lbs | | | |
| Installation & Service Access | Front Access, module removal. All internal electronics accessible | | | |
| Supported Installation Types | Standard Flat Wall Forward Tilt: up to 10° 90° exterior corners Concave faceted curve | | | |
| Controller Compatibility | Planar WallDirector Video Controller Optional: Brompton & Colorlight | | | |
| Regulatory Compliance | NRTL UL 60950-1 TUV Rheinland, FCC Class A, CE EN60950-1, EN 55032 Class A and EN55024, WEEE, CISPR 32/2015 | | | |
| Warranty | Planar EverCare Lifetime Limited Warranty (North America) | | | |

| Complete Model | HD109-12MFHD | HD137-15MFHD | HD164-18MFHD | DHD198-12MDFHD | UHD164-09MUHD | UHD219-12MHUD |
|---|---|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|--------------------------------|
| Display Technology | Direct View LED | | | | | |
| Display Resolution | 1920 x 1088 | 1920 x 1080 | 1920 x 1080 | 3840 x 1088 | 3840 x 2160 | 3840 x 2176 |
| Display Size (Diagonal) | 109in | 137in | 164in | 198in | 164in | 219in |
| Display Size (W x H) | 7.9ft x 4.5ft 2419 x 1361mm | 9.9ft x 5.6ft 3024 x 1701mm | 11.9ft x 6.7ft 3629 x 2041mm | 15.9ft x 4.5ft 4839 x 1361mm | 11.9ft x 6.7ft 3629 x 2041mm | 15.9ft x 8.9ft 4839 x 2722mm |
| Pixel Pitch | 1.26 x 1.25 mm | 1.575mm | 1.89mm | 1.26 x 1.25 mm | 0.9mm | 1.26 x 1.25 mm |
| Brightness Max, Calibration On | 1600nits | | | | | |
| Contrast Ratio | 10,000:1 | | | | | |
| Brightness Uniformity | ≥97% | | | | | |
| Color Uniformity | ≥97% | | | | | |
| LED Refresh Rate | 3480hz | | | | | |
| Color Temperature Range (k) | 3,000 - 10,000 | | | | | |
| Viewing Angle (50% Brightness) | >170° Horizontal; >140° Vertical | | | | | |
| Video Controller Size | 1U rack-mounted controller, 19" rack | | | | | |
| Video Input Resolution, Max | 3840 x 2160 @ 60hz | | | | | |
| Frame Rate | 50, 60hz | | | | | |
| Video Inputs | 4x HDMI 2.0 (w/ HDCP 2.2) | | | | | |
| HDR Support | Yes | | | | | |
| Control | IR Remote Control, RS-232, USB, Network, Planar WallDirector Software | | | | | |
| Installation & Service Access | Front, Planar tool supplied, Module Locking feature | | | | | |
| Runtime Duty Cycle (Hours/Day) | 24 x 7 | | | | | |
| LED Lifetime, Typical | 100,000hrs | | | | | |
| Line Voltage | 100-240V AC, 50/60hz | | | | | |
| Power Consumption, Maximum | 2,230 watts | 3,445 watts | 4,930 watts | 4,390 watts | 4,930 watts | 8,710 watts |
| Display Weight | 112kg 247lbs | 176kg 388lbs | 249kg 547lbs | 222kg 489lbs | 255kg 561lbs | 439kg 965lbs |
| Storage Temperature/Humidity (degrees F/C) | -40° to 60° C -40° to 140° F 10-85% relative humidity, non-condensing | | | | | |
| Operating Temperature/Humidity (degrees F/C) | -20° to 40° C -4° to 104° F 10-80% relative humidity, non-condensing | | | | | |
| Warranty | Planar EverCare Lifetime Limited Warranty (North America) | | | | | |
| Package Includes | Display wall, Planar WallDirector Video Controller, Signal cables, Power cables, Wall mount, Trim, Remote Control, and Module Spares (May vary by region) | | | | | |

Specifications may vary by model and selected video controller. This specification assumed Planar WallDirector Video Controller

For more information visit: www.planar.com/products/led-video-walls/planar-directlight-pro

Planar is a trademark of Planar Systems, Inc. All other trademarks and service marks are property of their holders. Copyright © 2024 Planar Systems, Inc. All rights reserved. This document may not be copied in any form without permission from Planar. Information in this document is subject to change without notice. 4/2025